




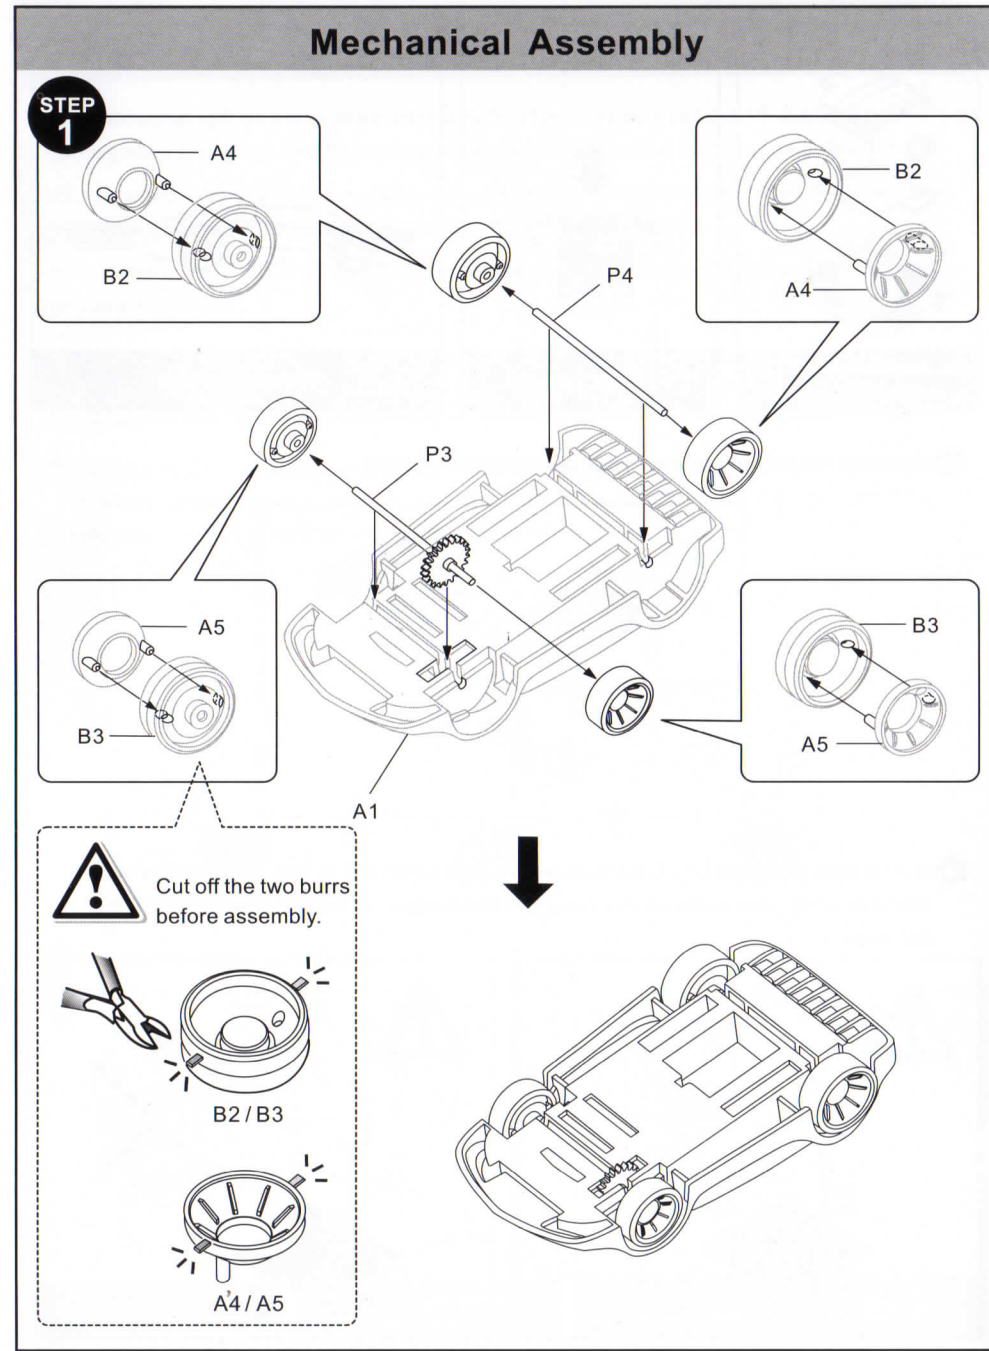
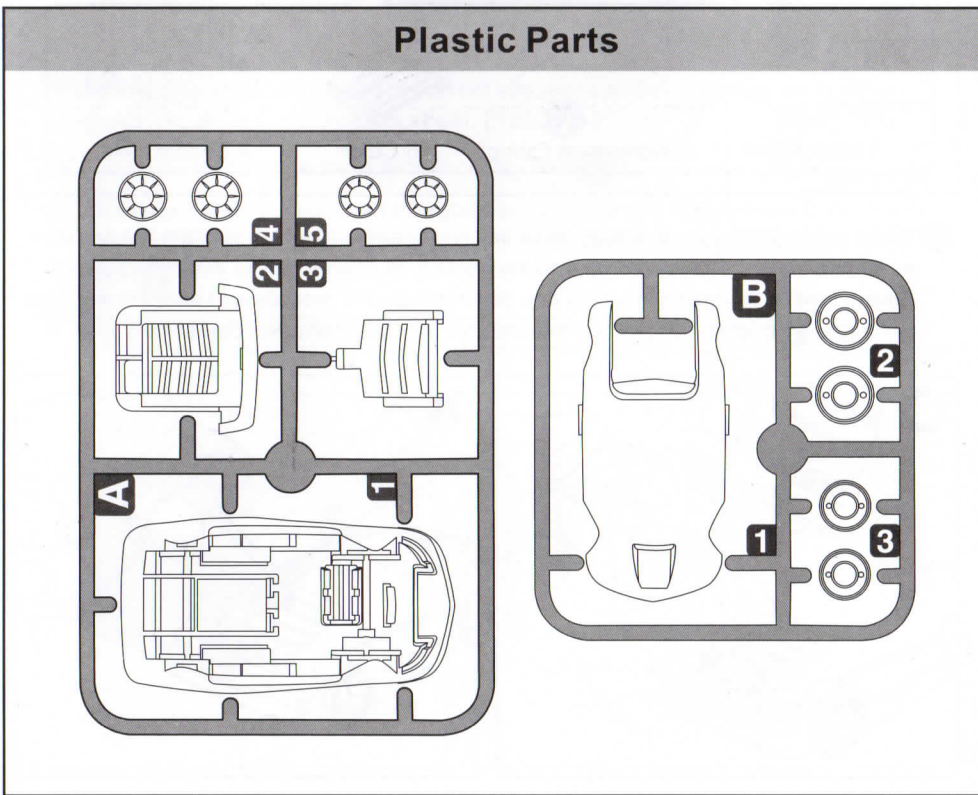
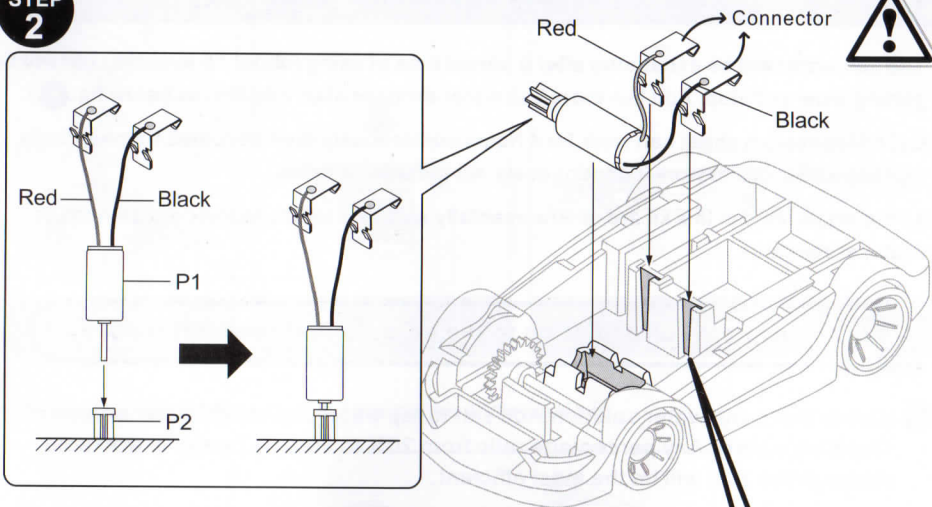




P4 Round Shaft		QTY	P5 Air Cathode(Black)		QTY	P6 Nonwoven Fabric		QTY
		1			1	(Spare part: 1pc)		1
P7 Magnesium Sheet		QTY	P8 Plastic dropper		QTY			
(Spare parts: 2pcs)		1			1			




STEP 2




Noted: each connector must be set in right position

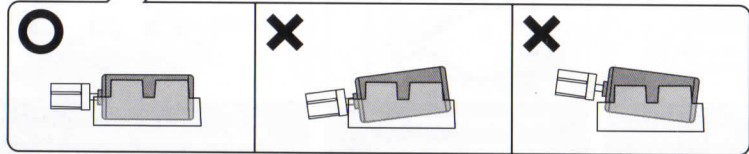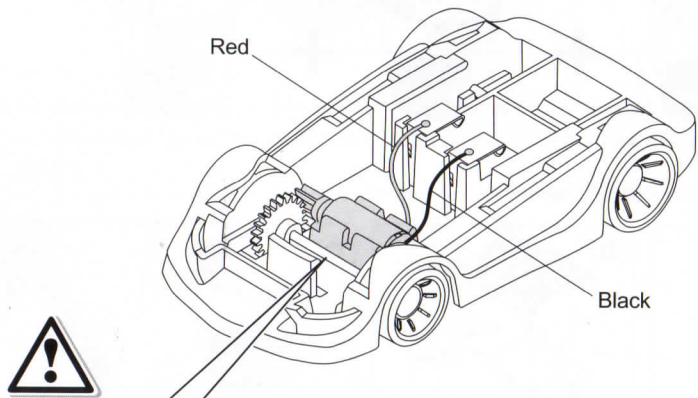

STEP 3

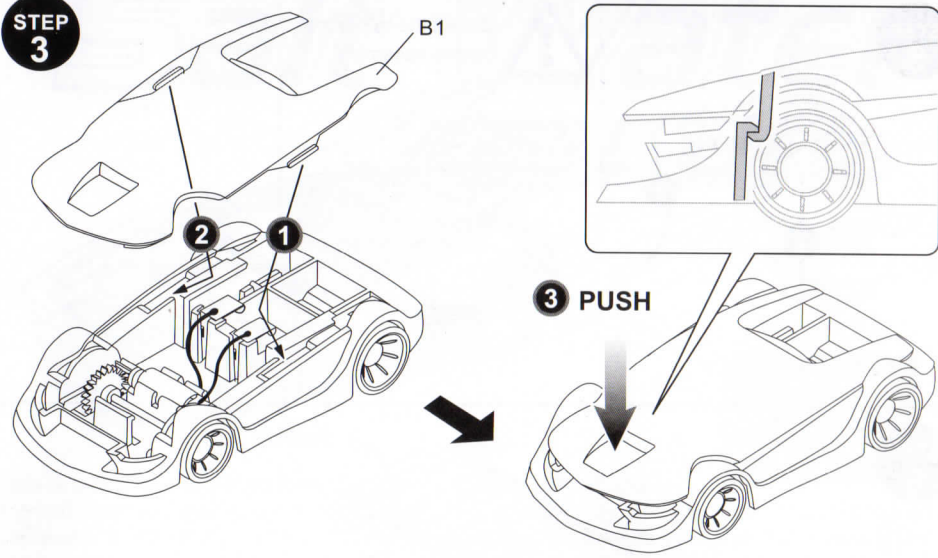


STEP 4

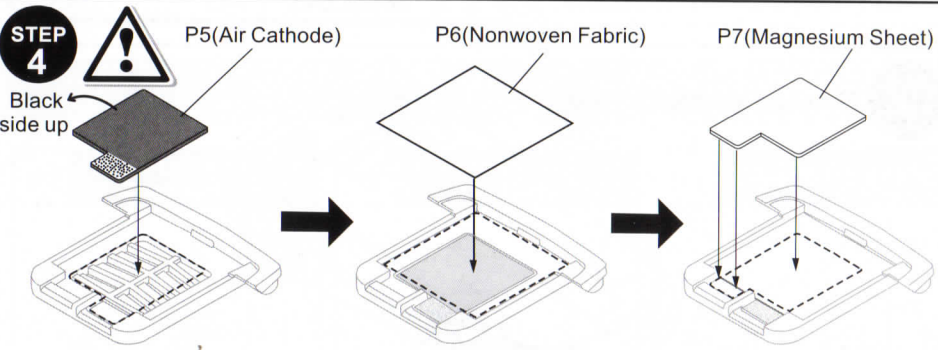


Make sure the above 3 parts placed in correct sequence and position.

STEP 5

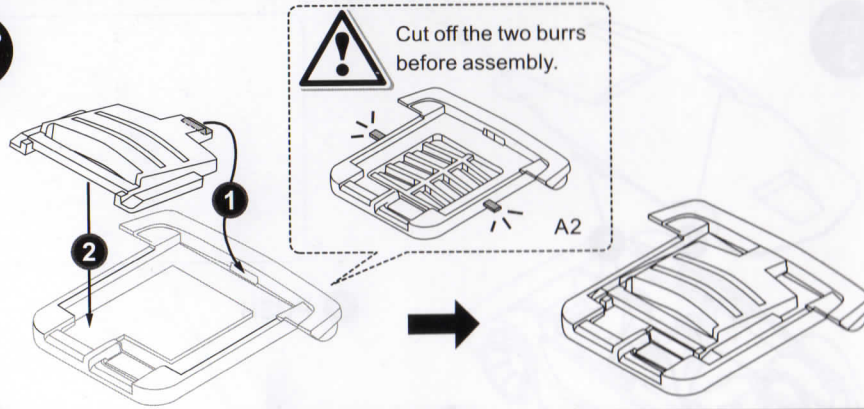


STEP 6

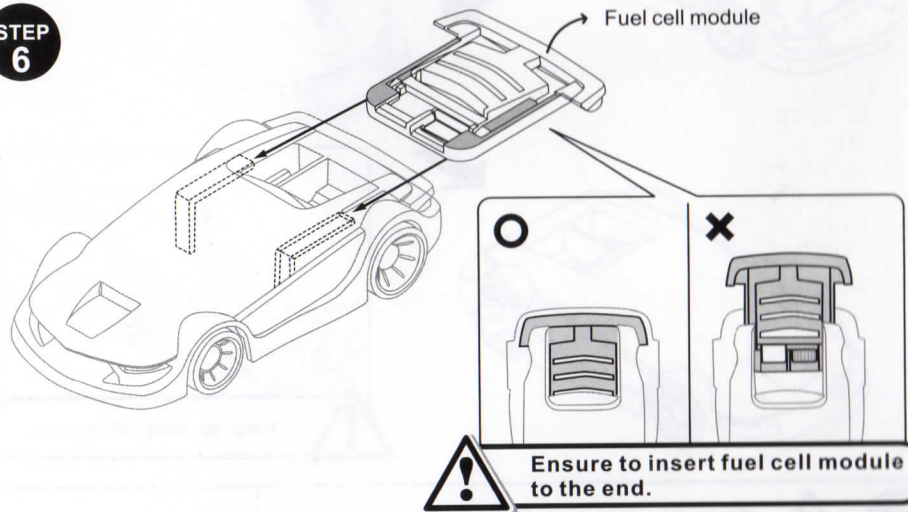

STEP 7

Finished product!

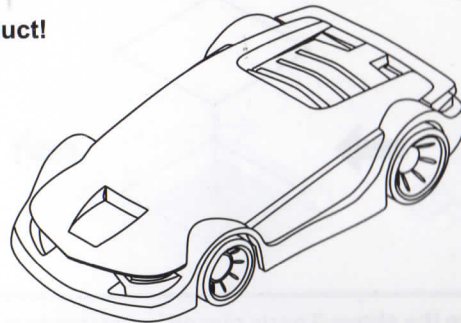

How It Works

The salt water will be exhausted after a period time of using (about 15 minutes), car will be getting slow and stop. Add few more salt water drops to start it again (as below fig. 6).

Each Magnesium sheet can work for 4 hours continuously, then becomes fragmentarily, replace a new one to work it continuously. Kit included 3 refills.

All materials used in this kit are environmentally safe and clean, no toxic substances or disposal concerns.




Please pay full attention to the below mentioned before use!


- 1 How to make salt water solution: Add salt to tap water or distilled water at ratio of 1(salt):5(water). Any percentage ratio from 20% to 99% salt water is workable although the 20% will be the most efficient.



- 2 How to fill the car with salt water:

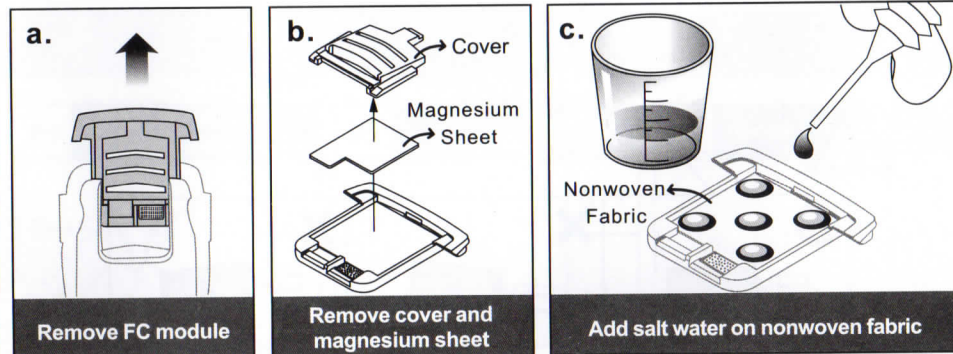


d.




Reassemble cover and magnesium sheet

e.




Insert FC module

f.

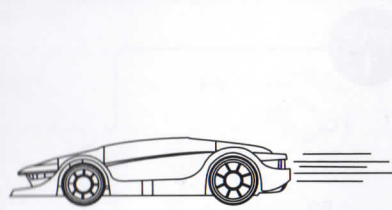

Run your car now


3 Remove FC module to stop your car as shown below:

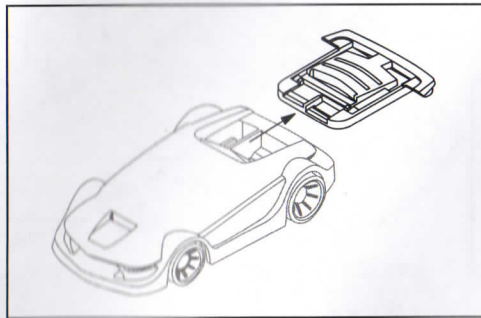


4 It is necessary to clean FC module every time when not in use, gently rinse air cathode under tap water, don't hand rub the surface to ensure the quality of air cathode.




5 Flush below parts and hand rub the surface, make sure no salt residue. Dry all parts separately. (Important: If salt is residual on the magnesium sheet, it will shorten it's life.)

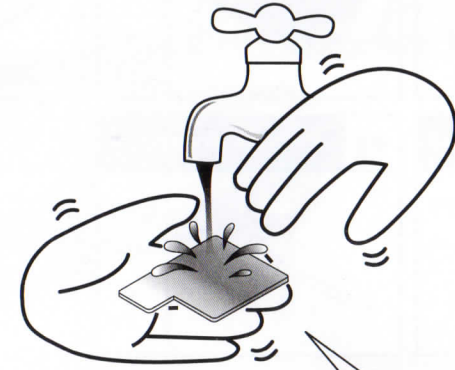


1. Magnesium



2. Nonwoven Fabric



3. Cover



4. Bottom base

6 When car is getting slow or stop, suck salt water and add few drops into the position as shown on the left, don't drop into the polarity of connectors to avoid oxidization. (Important: If the fabric is totally dry, disassemble FC module and add salt water as per figure 2 c, or it will take few minutes to have the fabric wet completely.)

